


Technical sheet: MCP-NY-1033

Selection	Manufacturer's brand:	INTARCON
	Equipment model:	MCP-NY-1033
	Description:	Monoblock unit for positive temperature refrigeration for over-door mounting .



Rating conditions	Room temperature:	0.0 °C	Room relative humidity:	85.0 %
	Ambient temperature:	35.0 °C	Altitude:	0 m
Performance	Cooling capacity:	1580 W	Power input:	1,10 kW
	Nominal current:	6,0 A	Maximal current:	9,7 A
	Evaporator airflow:	600 m ³ /h	Condenser airflow:	575 m ³ /h
	Refrigerant:	R134a	Refrigerant load:	0,8 kg
	Input voltage:	230V.1.50f	Total performance COP:	1,44 W/W

Condenser dimensions

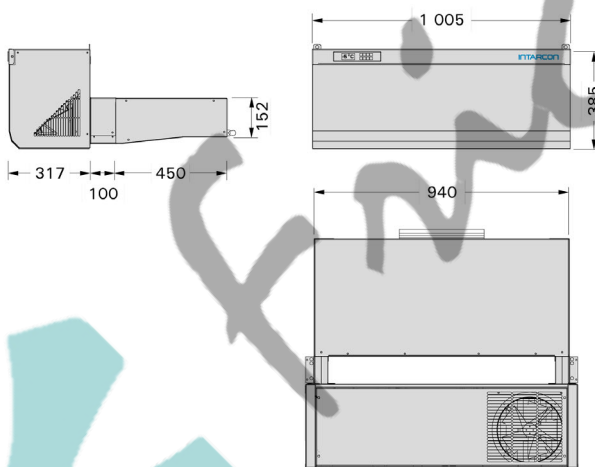

Length:	1005 mm	Width:	358 mm
Height:	395 mm	Weight:	77 kg
Sound pressure level at 10m:	33 dB(A)		

Ecodesign parameters	Room temperature:	0 °C	Room relative humidity:	85.0 %
	Annual energy consumption (Q):	4771 kWh	Seasonal energy performance ratio (SEPR):	1,94

Parameters at full load and ambient temperature 32°C	Rated cooling capacity (P _A):	1,51 kW		
	Rated COP (COP _A):	1,52	Rated power input (D _A):	0,99 kW